Plaza Drinking Fountain



PRODUCT FEATURES

- High Strength fabricated steel construction
- All fixings: Stainless Steel 316
- · Bottle filler tap
- Easy back-panel access
- Supplied fully assembled

DIMENSIONS

• Height 1009mm Width 150mm Depth 250mm

BODY SPECIFICATIONS

Body

- 5.0mm thick Mild Steel
- · 10.0mm Base Plate
- Hot Dip Galvanised AS/NZS 4680:2006
- Protective tap guards
- $\cdot \ \square$ Optional Powder Coat Colour Finish

Taps


- Drinking tap
- Time-delay bottle filler tap


Dog Drinking Bowl

 □ Optional tilting dog drinking bowl, 3.0mm Stainless Steel 316

Eiving

Surface Mount

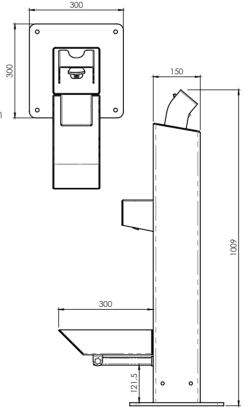

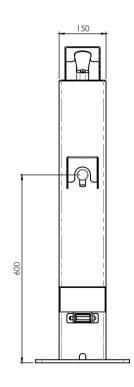



Plaza Drinking Fountain

Care & Maintenance Suggestions

Our products are constructed using a variety of different materials, all of which are highly corrosion resistant. Despite this, some care is required to maintain their good looks. The extent to which cleaning is required will depend on a number of factors including environmental conditions, construction activity and level of use.

MAINTAINING THE METAL SURFACES

To maintain the original appearance of the metal, it should be cleaned regularly using warm soapy water.

Galvanised Steel: If the galvanised coating is significantly penetrated, a zinc rich primer should be applied to the damaged area to maintain its corrosion resistance.

Stainless Steel: Clean the stainless steel components using warm water with a mild detergent with a non abrasive cloth or sponge. Heavier stains may require the use of a nylon scouring pad. As a rule always start with the least severe method of cleaning as the use of scouring pads or scotch bright may result in altering the surface texture. When scouring a beadblasted finish, use a random circular rubbing action - for brushed finishes always use a straight back and forward rubbing action in the direction of the grain.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particular in areas where construction work has been undertaken. Such stains can be removed using an abrasive pad as described above.

MAINTAINING THE PAINTED OR POWDER COATED SURFACES

Clean regularily with warm soapy water. Should the paint become chipped or scratched, it can be touched up using an acrylic based paint.









DOC 1106/1